



CooVox PBX Manager System

CooVox IPPBX T-Series Manager

Administrator Guide

PBX Manager Access Links:

<https://eu.pbxproxy.com>


<https://sg.pbxproxy.com>

<https://uae.pbxproxy.com>


<https://us.pbxproxy.com>

<https://sa.pbxproxy.com>

Please access the PBX Manager address corresponding to your region through the web browser, and the browser connection protection may come up. If it does, please click on the Advanced -> Processed to access the IPPBX Manager.

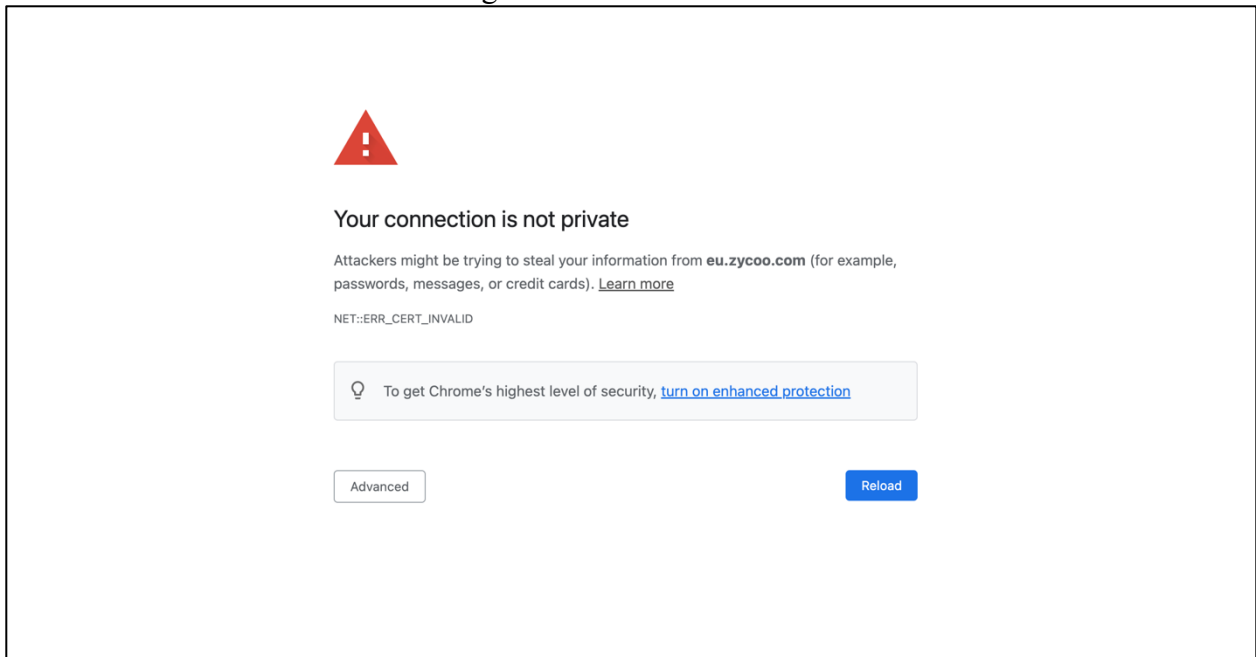

Please use the log-in credential provided by ZYCOO, select the appropriate language, and click on the "Login" button to access the IPPBX Manager platform.

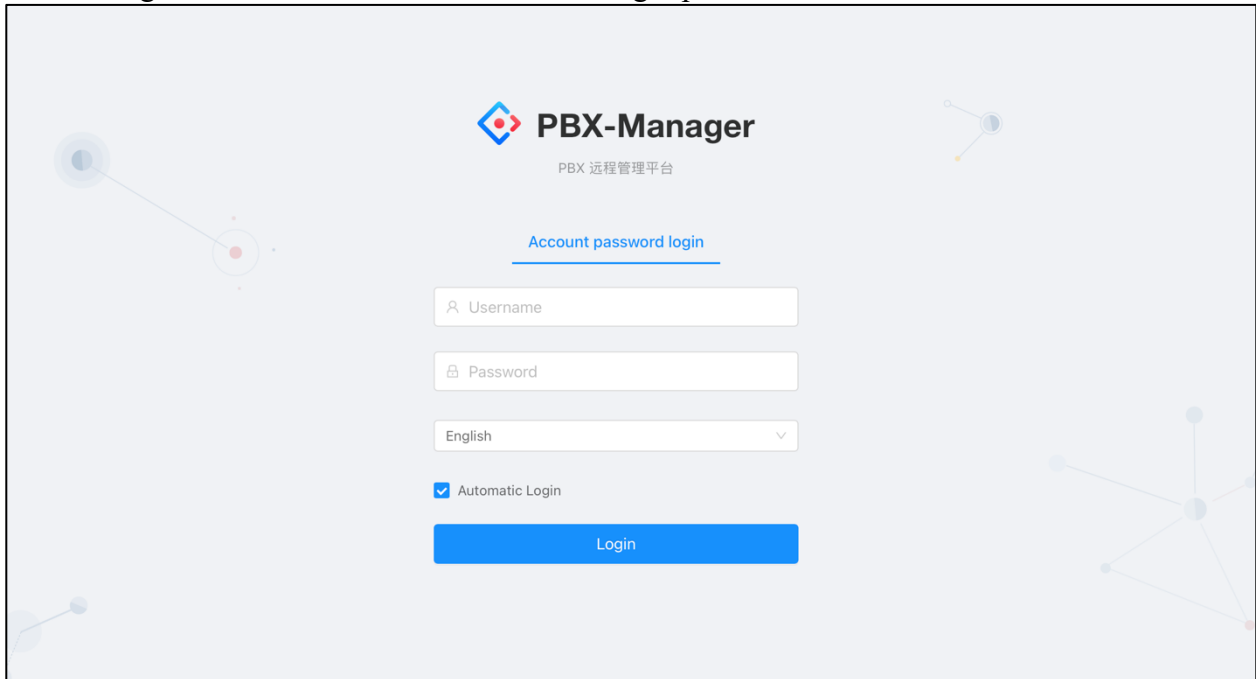


The screenshot shows the login interface for PBX-Manager. At the top center, there is a logo consisting of a blue diamond with a red dot inside, followed by the text "PBX-Manager" and "PBX 远程管理平台" below it. Underneath the logo, the text "Account password login" is underlined. The login form includes a "Username" input field with a magnifying glass icon, a "Password" input field with a lock icon, a language dropdown menu currently set to "English", and a checked checkbox for "Automatic Login". A prominent blue "Login" button is located at the bottom of the form. The background features a light blue gradient with faint network diagrams.

DASHBOARD


MONITOR

Under the Monitor page, you can monitor all the connected IPPBX devices and access them.

Access: You can access each connected device by clicking the “Access” button, and it will redirect you to the corresponding device system.

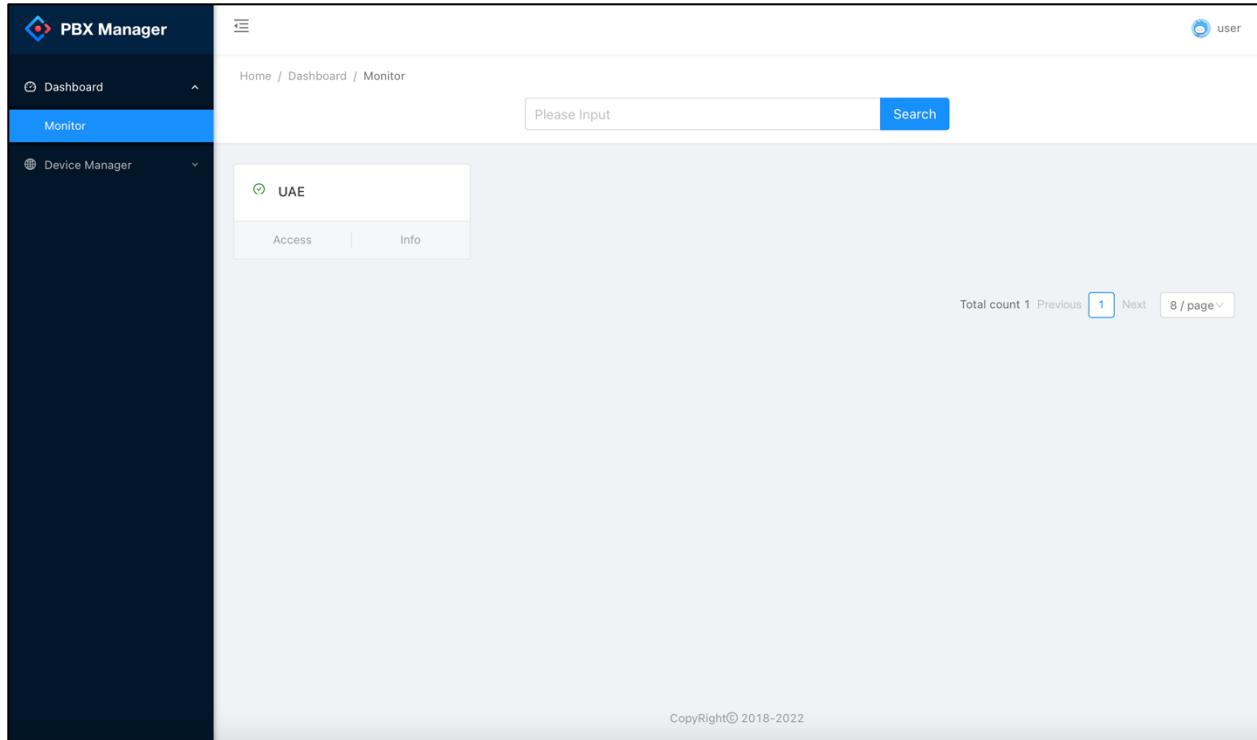


Info: You can check the device information such as company name, contact person, contact number, and note by moving the mouse close to the “Info” button.

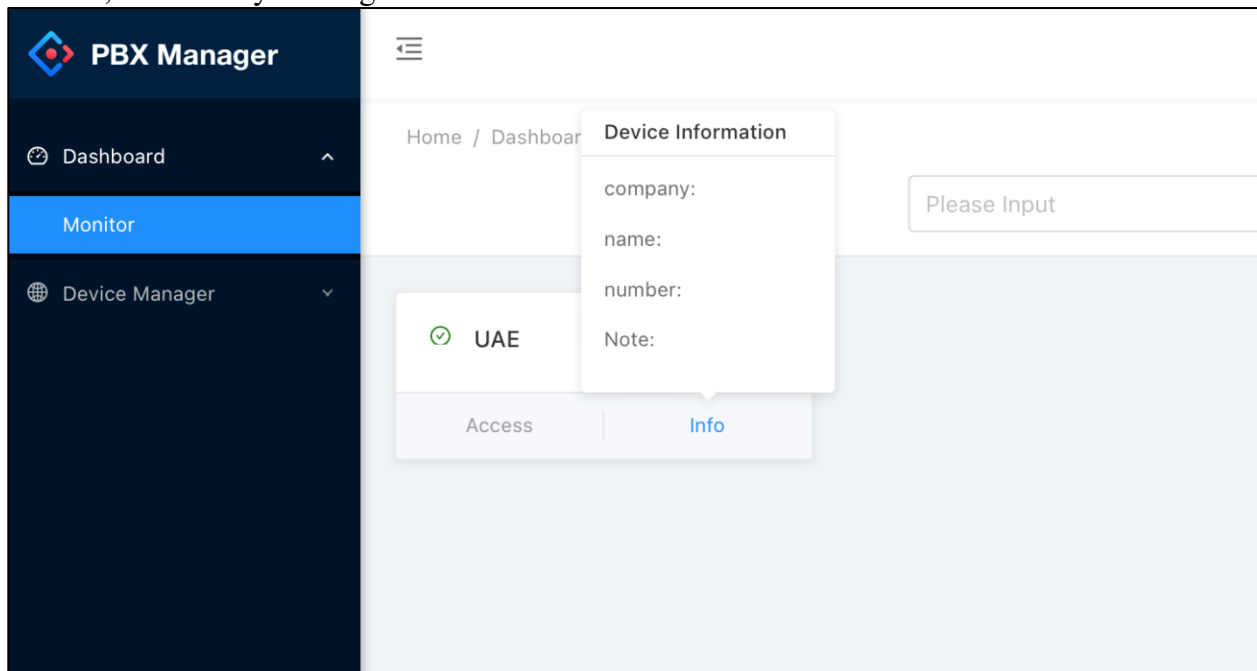

DEVICE MANAGER

DEVICE LIST

The Device List page shows a list of connected IPPBX devices, and you can add new devices, edit or delete existing devices.

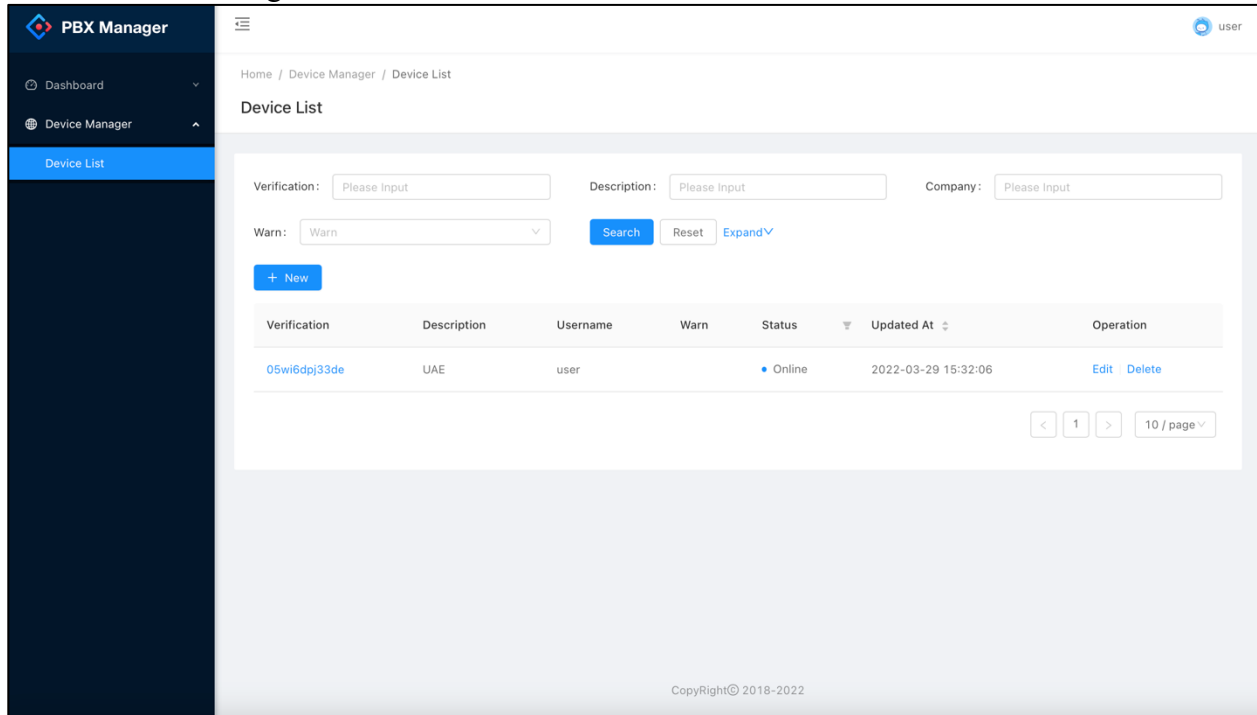

By adding a new device, please click on the "New" button for adding a new device with the platform, copy the verification code, fill in the description and other information, click on the "OK" button to submit the request.

Add [X]

* Verification: 05cydrpxu4t2 [Copy]

* Description: [Please Input]

Company: [Please Input]

Contact: [Please Input]

Phone: [Please Input]


Note: [Please Input]

[Cancel] [OK]

Selecting the specific device, click on the “Edit” or “Delete” buttons on the right to modify the device information.

Verification	Description	Username	Warn	Status	Updated At	Operation
05wi6dpj33de	UAE	user		Online	2022-03-29 15:32:06	Edit Delete


After copying the new device’s verification code from the IPPBX Manager platform, please paste the code within the corresponding IPPBX system under path: *Addons/Remote Management*.

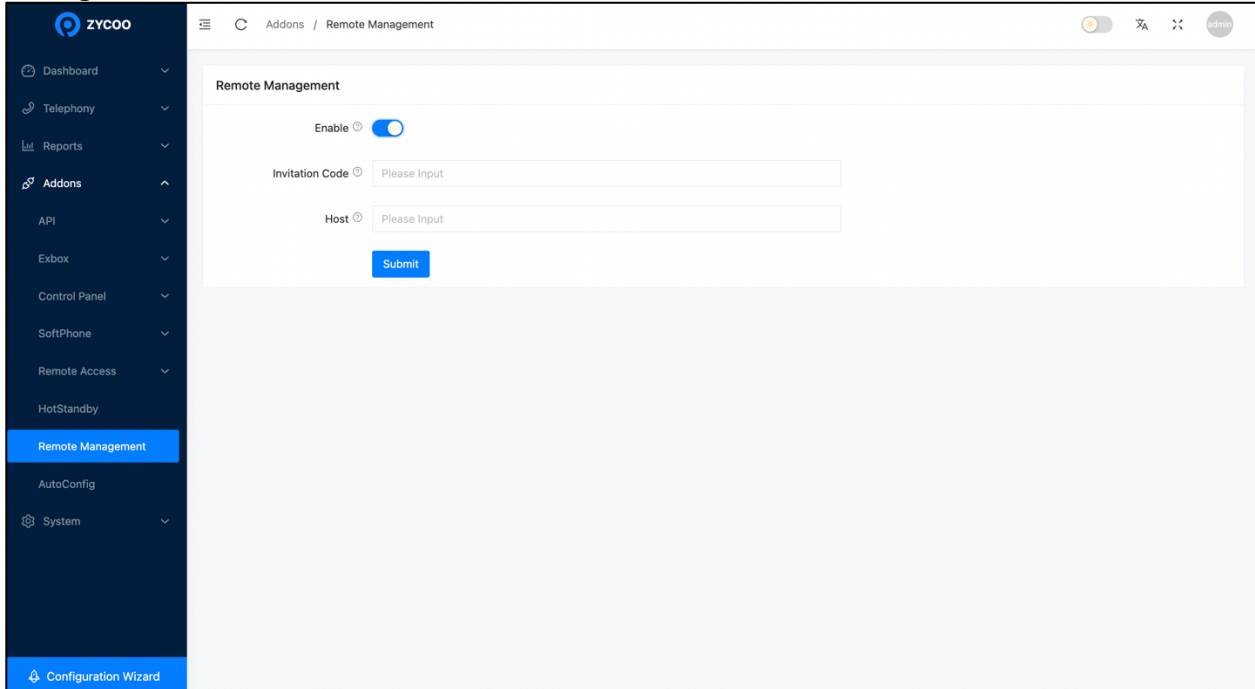


- **Enable:** Enable/Disable the remote management service. After enabling the remote management service, technicians can access the IPPBX web page directly through the IPPBX Manager platform.
- **Invitation Code:** The serial number generated by the IPPBX Manager platform.
- **Host:** IPPBX Manager platform address; can be blank.

SETTING

Please click on the round portrait on the upper right concern to access the Setting page. You can modify the account information within the Setting page, such as updating the account password, email address, etc.



 user

Home

Update Profile

Username:

Phone:

Password:

Email:



Официальный дистрибутор в России и СНГ ООО «ТМС»
Россия, 117519, Варшавское шоссе, дом 133, офис 370
Телефон: +7 (495) 723-81-21 | +7 (495) 723-33-33 (7/24)
E-Mail: sales@tmc.ru | support@tmc.ru